

Any Weather / Long Distance / Plug-N-Play



Scout IP


PTZ-DOME

2MP IR IP PTZ Camera with 22x Motorized Lens

Features

- 820 Feet Video/Audio over normal Cat5e (Exclusive Enviro Cams Extended Mode)
- Full 360° Pan, auto reversing Tilt, motorized 22x Zoom and 1024 presets savable
- IP66 Weatherproof – Outdoor
- Wide Temperature Rating: -40° below to +149° F
- Digital WDR
- Large 1/2.9" Progressive Scan CMOS Chip for better light gathering ability
- 2 Megapixel Resolution (1920x1080 max) – H.264/H.265/MJPEG options - Triple Stream capable
- Motorized 5.2-114.4mm Varifocal Auto-Focus 22x Optical Megapixel Zoom Lens
- Up to 490' Infrared Illumination with Intensity-Controlled Smart IR's
- Optical glass window with higher light transmittance
- 12V DC 3.33amp power supply provided with every camera
- Optional Onboard Micro SD Card for stand-alone or POE loss Recording – with Automatic Download to NVR when POE is restored
- Long Arm Wall Mount and Flush Pendant Mount both provided standard

Dimensions

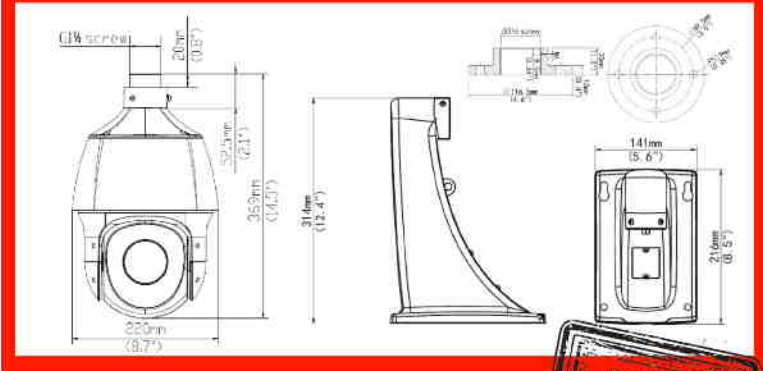

We guarantee at least 820' for Video & Audio



201 N. Elm St.
Kemp, TX 75143

ENVIRO
cams

866-264-0041
sales@envirocams.com

Not Your Father's IP Cameras

Scout IP Specifications



Camera	
Sensor	1/2.9" progressive scan, 2.0megapixel, CMOS
Lens	5.2~ 114.4 mm (22x optical zoom)
Angle of View (H)	54.40° (wide) ~ 3.44° (tele)
Iris	Auto/Manual; F1.5
Shutter	Auto/Manual, 1/6s ~ 1/100000s
Min. Illumination	Colour: 0.01 Lux (F1.5 AGC ON) / 0 Lux with IR
Day/Night	IR-cut filter with auto switch (ICR)
Digital Noise Reduction	2D/3D DNR
Defog	Digital Defog
S/N	>55dB
WDR	DWDR

Video	
Max. Resolution	1920x1080
Video Compression	H.265, H.264, MJPEG
Frame Rate	1080P (1920x1080):Max.30 fps; 720P (1280x720):Max.30 fps; D1 (720x576):Max.30 fps
Video Streaming	Triple
OSD	Up to 8 OSDs
Privacy Mask	Up to 24 areas
ROI	Up to 8 areas
Motion Detection	Up to 4 areas

Smart	
Behavior Detection	Intrusion, crossing line, motion detection
Intelligent Identification	Face detection
Statistical Analysis	People counting
General Function	Watermark, IP Address Filtering, Tampering Alarm, Access Policy, ARP Protection, RTSP Authentication, User Authentication

Storage	
Edge Storage	Micro SD, up to 128 GB

Network	
Protocols	L2TP, IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, SIP, 802.1x
Compatible Integration	ONVIF (Profile S and G),API

Structure	
Pan Range	360° endless
Pan Speed	0.1°/s ~ 240°/s - Preset speed: 300°/s
Tilt Range	-15° ~ 90° (auto reverse)
Tilt Speed	0.1°/s~80°/s - Preset speed: 80°/s
Number of Presets	1024
Patrol	Preset patrol, route patrol, recorded patrol
Home Position	Supported

Interface	
Network	10M/100M Base-TX Ethernet
Video Output	1 BNC, impedance 75 Ω; amplitude 1 V [p-p]

General	
Power **	DC12V + or -10% Power consumption: Max 16-30W
Dimensions (Ø x H)	8.5"x13.5"
Weight	6.6lb
Working Environment	-40°C ~ +65°C (-40°F ~ 149°F), Humidity ≤ 95% RH(non-condensing)
Ingress Protection	IP66

** Supplied 12V DC power supply recommended and must be powered within a hundred and fifty feet using this DC voltage**



Standard Wall mount

Standard Mounts Included



Standard Flush mount


Unequaled Product Testing

- ▶▶ QUALITY
 ▶▶ RELIABILITY
- ▶▶ DISTANCE
 ▶▶ ENVIRONMENT

Customer Focused, Quality Driven!!



Dealer Info

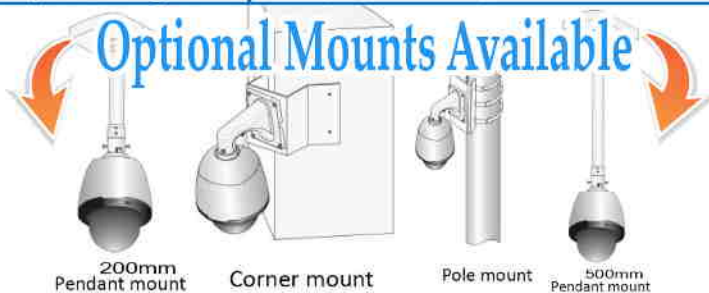

201 N. Elm St.
Kemp, TX 75143



866-264-0041
sales@envirocams.com

