

Any Weather / Long Distance / Plug-N-Play



Top Mast 30

PTZ-DOME




2MP Starlight IP PTZ Camera with 30x Motorized Lens

Features

- 820 Feet Video/Audio over normal Cat5e (Exclusive Enviro Cams Extended Mode)
- Full 360° Pan, auto reversing Tilt, motorized 30x Zoom and 255 presets savable
- IP66 Weatherproof – Outdoor
- Wide Temperature Rating: -4° below to +149° F
- WDR (Sony's 120dB Wide Dynamic Range)
- Large 1/2.8" Progressive Scan CMOS Chip for better light gathering ability
- 2 Megapixel Resolution (1920x1080 max) – H.264/H.265/MJPEG options - Triple Stream capable
- Motorized 4.5-135mm Varifocal Auto-Focus 30x Optical Megapixel Zoom Lens
- 6 sequences with up to 18 presets
- Starlight Technology used for great "no light" illumination
- High Strength Aluminum PTZ case used so it can withstand harsher environments.
- 12V DC 2amp power supply provided with every camera
- Made specifically for Top Mounting on vehicles or any horizontal surface.

Dimensions

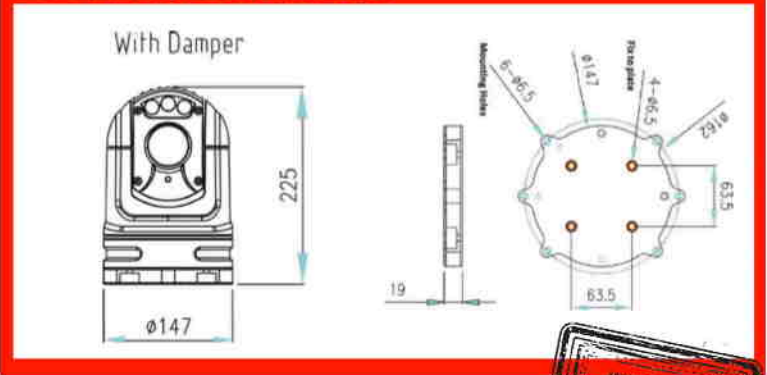

We guarantee at least 820' for Video & Audio



201 N. Elm St.
Kemp, TX 75143



866-264-0041
sales@envirocams.com


Not Your Father's IP Cameras

Top Mast 30 Specifications



Camera	
Sensor	1/2.8", 2megapixel, progressive scan, CMOS
Lens	4.5 ~ 135mm (30x optical zoom)
Angle of View (H)	67.8° (wide) ~ 2.77° (tele)
Iris	Auto/Manual; F1.6
Shutter	Auto/Manual, 1/1s ~ 1/30000s
Min. Illumination	Colour: 0.005 Lux (F1.6 AGC ON, 50IRE) / 0.0005 Lux with IR
Day/Night	IR-cut filter with auto switch (ICR)
Infrared Distance	60m
White balance	Auto / Manual / ATW / Indoor / Outdoor
AGC	Auto / Manual
S/N	>50dB
WDR	120 dB
Video	
Max. Resolution	1920x1080
Video Compression	H.265, H.264, MJPEG
Frame Rate	1080P (1920x1080):Max.60 fps; 720P (1280x720):Max.30 fps; D1 (720x576):Max.55 fps
Video Output	BNC / RJ45
Video Streaming	Triple
OSD	Supported
Digital Zoom	Supported
Network	
Protocols	Pelco P & Pelco D with self adaptive baud rate of 2400bps, 4800bps, 9600bps or 19200bps
Compatible Integration	ONVIF,API

Structure	
Pan Range	360° endless
Pan Speed	0.5°/s ~ 80°/s - Preset speed: 100°/s
Tilt Range	-20° ~ 90° (auto reverse)
Tilt Speed	0.5°/s~60°/s - Preset speed: 100°/s
Number of Presets	255
Patrol	6 patrols with up to 18 presents each
Pattern	4 patterns with total recording time of 10 minutes
Locking Position	Horizontal and Vertical planes locked when power is removed from camera
Home Position	Supported
General	
Power **	12V DC 2A Power consumption: Max 30W
Dimensions (Ø x H)	8.9"x5.8"
Weight	7.7lb
Working Environment	-20°C ~ +65°C (-4°F ~ 149°F), Humidity ≤ 95% RH(non-condensing)
IR	Built-in Infrared / Starlight Illumination
Ingress Protection	IP66
** Supplied 12V DC power supply recommended and must be powered within a couple hundred feet using this DC voltage**	

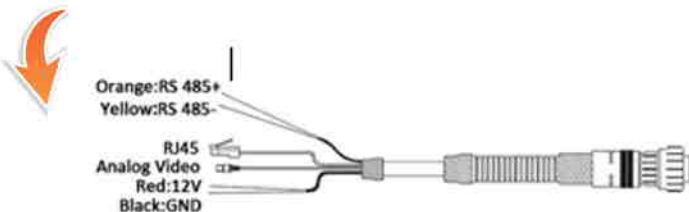

Unequaled Product Testing

- QUALITY
- RELIABILITY
- DISTANCE
- ENVIRONMENT

Customer Focused, Quality Driven!!



Dealer Info



201 N. Elm St.
Kemp, TX 75143



866-264-0041
sales@envirocams.com

Not Your Father's IP Cameras