

Any Weather / Long Distance / Plug-N-Play

# Ex Proof Mini

## BULLET




## 2MP Explosion Proof Infrared IP Camera

### Features

- 320 Feet Video/Audio/Power over normal Cat5e or Cat6 cabling
- IP66 Weatherproof – Indoor or Outdoor
- Wide Temperature Rating: -40° below to +140° F
- Day Night IR-CUT auto switch
- 1/2.7" 2.0 megapixel, progressive scan, CMOS
- 2 Megapixel Resolution (1920x1080 max) – H.264/H.265/MJPEG options
- 4mm Fixed Megapixel Lens
- Optically Clear Glass front protecting the lens
- Up to 100' Infrared Illumination with Intensity-Controlled Smart IR's
- Apply to explosive gas and combustible dust environment
- Housing and bracket made from 304 stainless steel
- Special Anti-shock Engineering Technology
- Supports standard 48V POE power
- 2D and 3D Digital Noise Reduction options
- ATEX Certified
- Small volume, light weight, is specifically designed to meet the transport of dangerous goods, blast testing, and other volatile environments.

### Dimensions

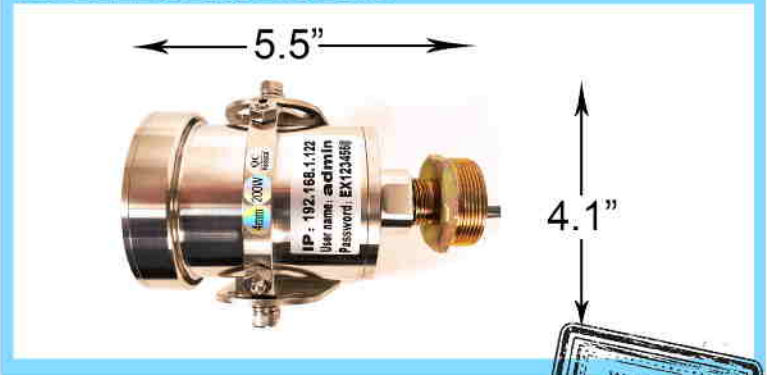


201 N. Elm St.  
Kemp, TX 75143



866-264-0041  
sales@envirocams.com

Not Your Father's IP Cameras

# Ex Proof Mini Specifications



Camera	
Sensor	1/2.7", 2 megapixel, progressive scan CMOS
Lens	4mm fixed lens
Certificates	ATEX Explosion Proof
CPU	TI-DSP
Min. Illumination	Color 0.1Lux@F1.2, BW 0.01 Lux@F1.2
IR Range	100 ft IR range
IR Wavelength	850nm
Day/Night	IR-cut filter with auto switch (ICR)
IR switch	IR lamp Auto-open when <0 Lux
S/N	>52dB
Noise Reduction	2D/3D-DNR
Video	
Max. Resolution	1920x1080
Video Compression	H.265, H.264, MJPEG
Frame Rate	1080P (1920x1080): Max. 25 fps, 720P(1280x720): Max. 25 fps
Image Setting	Rotate mode, Saturation, Brightness, Contrast adjustable by client software or web browser
H.264 Encoding type	Base Line Profile / Main Profile
Compression output rate	32 Kbps-8Mbps
Video Streaming	Main and Sub

Network	
Protocols	RTSP/FTP/PPPOE/DHCP/DDNS/NTP/UPnP
Compatible Integration	ONVIF,PSIA,CGI,ISAPI,GB28181
General	
Material	304 Stainless Steel
Power	48V POE
	Power consumption: Max 17.23W
Dimensions (Ø x H)	5.5"x3.6"x4.1"
Weight	2.6lb
Working Environment	-40°C ~ +60°C (-40°F ~ 140°F), Humidity ≤ 95% RH(non-condensing)
Ingress Protection	IP66

## Unequaled Product Testing

-  QUALITY
-  RELIABILITY
-  DISTANCE
-  ENVIRONMENT

**Customer Focused, Quality Driven!!**



Dealer Info



201 N. Elm St.  
Kemp, TX 75143



866-264-0041  
sales@envirocams.com

*Not Your Father's IP Cameras*